


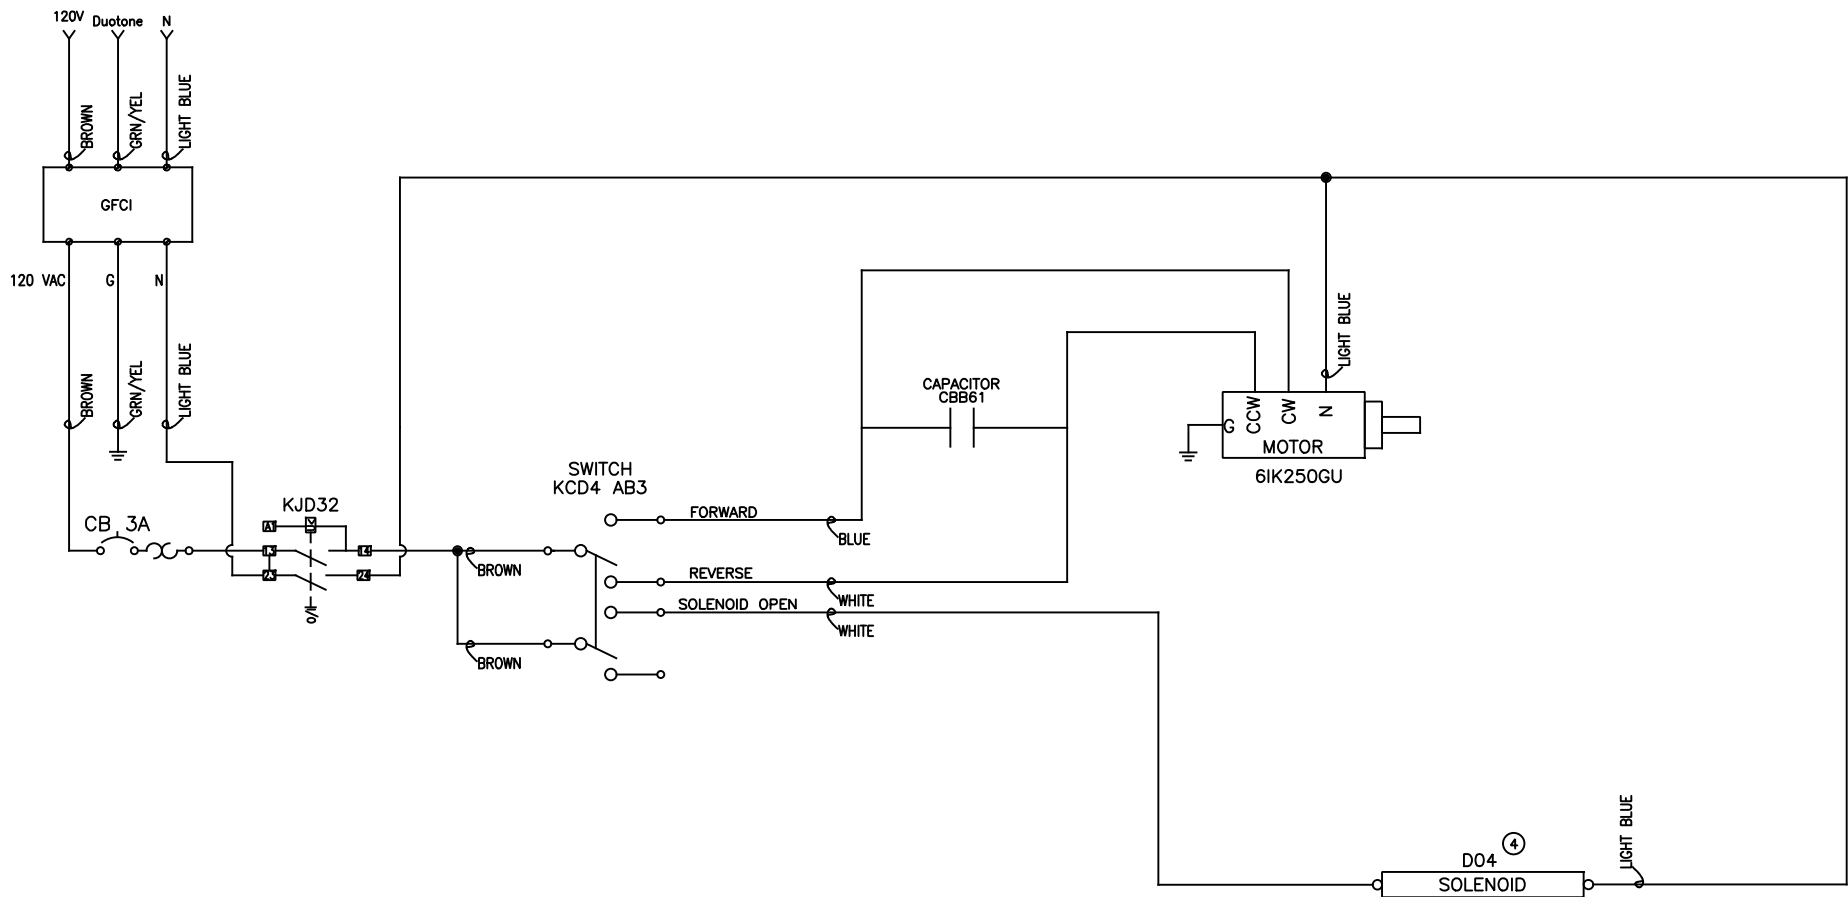

NOTES:

1. MOTOR SHALL BE WIRED TO THE GROUND POINT
2. SOLENOID VALVE SHALL BE WIRED TO THE GROUND POINT
3. WIRES SHOULD HAVE NO TENSION.
4. SOLENOID YELLOW WIRE HAS CONNECTOR IN SWITCH BOX

MUD MIXER.com

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MUDMIXER. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MUDMIXER IS PROHIBITED.

DRAWN: LM	TITLE: MUDMIXER 120VAC SCHEMATIC		
N/A			
N/A	SIZE: D	DWG. NO: MMXR-3225	REV: 1
N/A	SCALE: 1:1	WEIGHT:	SHEET 1 OF 1